

# EL150

## Broad Area Linear Array

- 4i) Designed to provide low angle of incidence illumination over a long, wide area
- 4i) Available in 38mm (1.5") increments up to 80"




### Ordering Information

Standard Product Variation:  
Shipped Within Three Weeks


Lighted Length (# of LEDs)	Spectral wavelength		Optional power Compatibility
	XXX	XX	
EL150	XXX	-	XXX XX
6 LEDs = 25mm (1")	(blue) 470†		12
	(green) 520†		24
	(yellow) 590		
	(orange) 625		
	(red) 660		
	(infra-red) 880		
	(white) WHI†		

† Not available in 12v


### Light Function Diagram

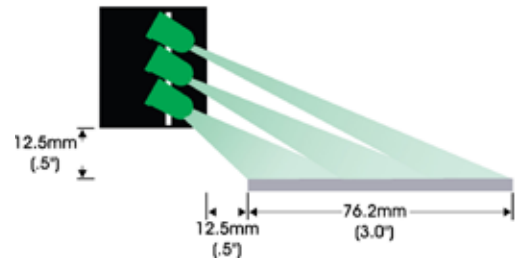

### Dimensional Information

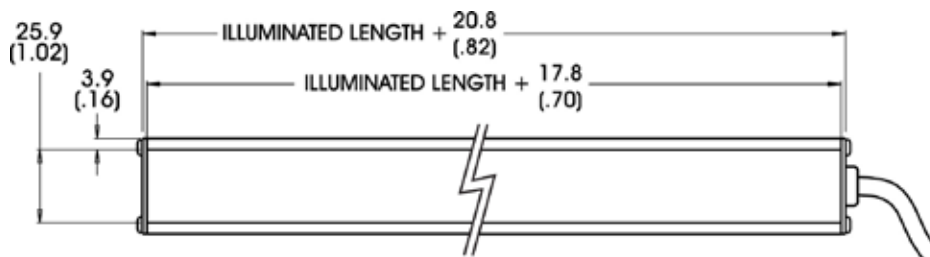

Cable Length: 1.5 Meter (59")



M6 NUT CHANNEL FOR MOUNTING  
(HARDWARE INCLUDED)

DIMENSIONS ARE IN MILLIMETERS (INCHES)

### Current Specifications

Maximum draw per 34mm (1.33") length

	(blue)	(green)	(yellow)	(orange)	(red)	(infra-red)	(white)	(RGB)	
@12	N/A	N/A	N/A	N/A	40	N/A	N/A	N/A	mA
@24	20	20	N/A	N/A	20	N/A	20	N/A	mA

### Product Information

Product Lifetime:	50,000 hours
Operating Temperature:	0-60° C