

EL174

High Intensity Line Light



- Aii** Designed for Large Area or Line Scan applications
- Aii** Available in 152mm (6") increments up to 72"

Ordering Information

Standard Product Variation:
Shipped Within Three Weeks


| | | | | | | | | | |
|-------|-------------------------------|---|-------|---|--|---|----------------------------------|---|---------------------------------|
| | Lighted Length (# of LEDs) | | Pitch | | Spectral wavelength | | Wash Down Option | | Optional power compatibility |
| EL174 | XXX | - | 01 | - | XXX | - | X | - | XX |
| | 1 LED = 25mm (1") | | | | (blue) 470† (green) 530† (red) 625 (white) WHI† | | H W (See spec below) | | 12 24 |

Optimal working distance:

304.8mm (12")


†Not available in 12v

Dimensional Information

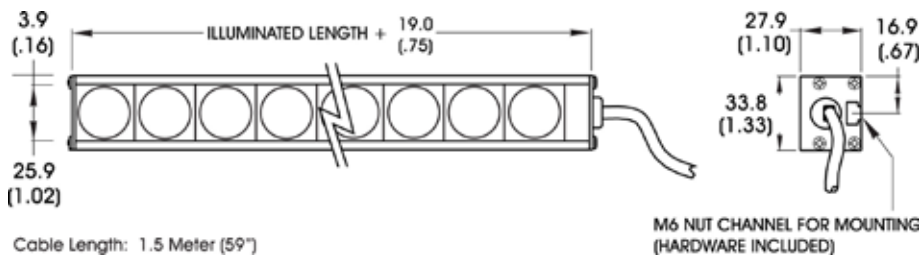

DIMENSIONS ARE IN MILLIMETERS (INCHES)

Optional Heat Sink

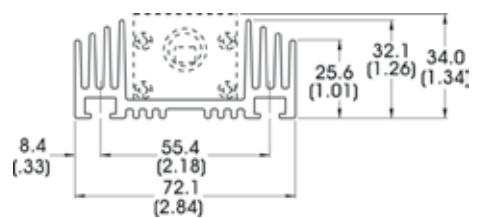

DIMENSIONS ARE IN MILLIMETERS (INCHES)

Current Specifications

Maximum draw per 152mm (6") length

| | (blue) | (green) | (yellow) | (orange) | (red) | (infra-red) | (white) | (RGB) | |
|-----|--------|---------|----------|----------|-------|-------------|---------|-------|----|
| @12 | N/A | N/A | N/A | N/A | 700 | N/A | N/A | N/A | mA |
| @24 | 350 | 350 | N/A | N/A | 350 | N/A | 350 | N/A | mA |

Product Information

| | |
|------------------------|--------------|
| Product Lifetime: | 50,000 hours |
| Operating Temperature: | 0-60° C |