

PS24

24 Volt Power Supply

- Aii** Universal input switching supply.
- Aii** 24 v regulated current DC - runs on 110-220v AC.



Ordering Information

Standard Product:
Shipped Next Day

Standard Product Variation:
Shipped Next Day

PS24


P/N: PS24

PS24 - XX
TL

Optional
Tinned
Leads

Input power:	90 VAC to 264 VAC universal; AC input frequency: 47 Hz to 60 Hz
Output power:	30 watts
Over voltage protection:	150% max., non-condensing
Over current protection:	Fully short circuit protected
MTBF:	50,000 hrs. at full load and 25 C
Safety compliance:	UL1950[E127643]; CSA 22.2 234 [LR56927-121]; TUV EN60950 [S9452057]; MITI [91-54488], [91-54489]
Operating temperature:	0 to 40 degrees centigrade

Dimensional Information

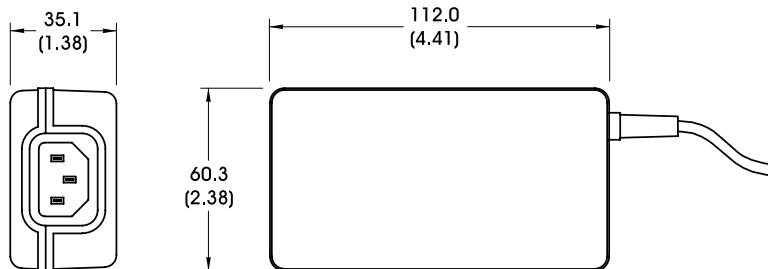

DIMENSION ARE IN MILLIMETERS (INCHES)

Additional Information

The PS24 is designed for use with most Ai electronics.
The PS24-TL is designed for use with CS100, CS100-IC,
CS300 and CS300-IC.

Includes US Cordset

Standard Product Information

Operating Temperature: 0-40° C



Meets CE standards