

# SL6404

## High Current LED Spot Light



- Aii** High intensity illumination from a long distance.
- Aii** Available with built in strobe or wash down options.

### Ordering Information

Standard Product:  
Shipped Next Day

#### SL6404

P/N: SL6404-WHI0300M24  
Configured for use with user supplied 24v regulated power supply.

Standard Product Variation:  
Shipped Within Two Weeks


	Spectral wavelength	Cable Option	Wash Down	Power Option
SL6404 -	XXX	X	X	XX
	(blue) 470†	A	W	12
	(green) 530†			24
	(red) 625			IS*
	(white) WHI†			
		500mm Turck Connector (Male)		

**\*Internal Strobe:**

Pulse width: 10-200µSec  
Trigger input: 3-24v rising edge,  
CMOS/TTL compatible 30Hz maximum

†Not available in 12v  
\*(Internal Strobe)

### Dimensional Information

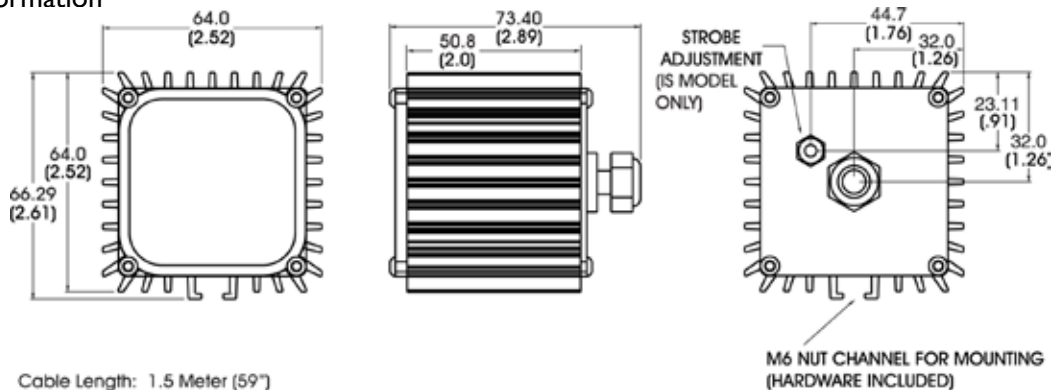

#### Standard Variation Current Specifications

	(blue)	(green)	(yellow)	(orange)	(red)	(infra-red)	(white)	(RGB)	
@12	700	700	N/A	N/A	700	N/A	700	N/A	mA
@24	350	350	N/A	N/A	350	N/A	350	N/A	mA

#### Standard Product Information

Product Lifetime:	50,000 hours
Operating Temperature:	0-60° C